


PVC Layflat hoses

Structure: Flexible hose made out of soft-grade PVC wall, reinforced with polyester yarn.





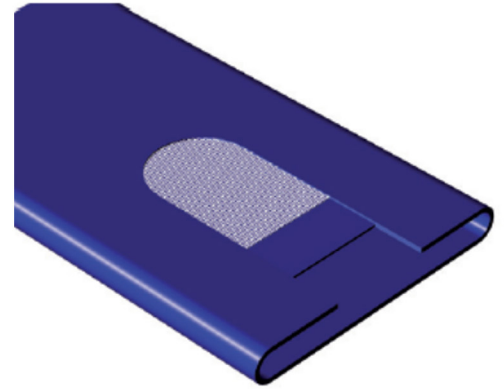

Application: Designed for heavy duty discharge of liquids compatible with PVC, in agriculture, civil engineering, tank trucks, and water delivery at heavy working pressure in irrigation systems.

Working temperature: -20/60°C



XDFLAT H

Heavy duty lay-flat discharge hose - reinforced with polyester yarn

 int mm	 int inch	 kg/ m	 bar	 bar	 m
25	1"	0.17	8	24	10-100
38	1.5"	0.28	8	24	10-100
52	2"	0.38	8	24	10-100
63	2.5"	0.48	7	21	10-100
77	3"	0.60	6	18	10-100
103	4"	0.90	6	18	10-100
110		0.93	5	15	10-100
127	5"	1.20	5	15	10-50
153	6"	1.45	5	15	10-50
204	8"	2.10	4	12	10-50

